



## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,Low forward voltage drop
- Single rectifier construction
- High surge capability
- For use in low voltage ,high frequency inverters, free wheeling ,and polarity protection applications
- High temperature soldering guaranteed:260°C/10 seconds, 0.25"(6.35mm)from case
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



## TO-277

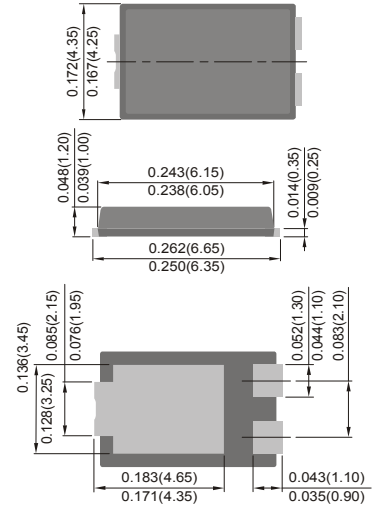

Dimensions in inches and (millimeters)

## MECHANICAL DATA

**Case :** Packed with FRP substrate and epoxy underfilled

**Terminals :** Pure Tin plated (Lead-Free), solderable per MIL-STD-750, Method 2026.

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load,derate by 20%.)

|  | Symbols                   | SP 1020L    | SP 1030L | SP 1040L | SP 1050L | SP 1060L | SP 1080L | SP 10100L | SP 10150L | SP 10200L | Units |
|--|---------------------------|-------------|----------|----------|----------|----------|----------|-----------|-----------|-----------|-------|
| Maximum repetitive peak reverse voltage  | $V_{RRM}$                 | 20          | 30       | 40       | 50       | 60       | 80       | 100       | 150       | 200       | Volts |
| Maximum RMS voltage  | $V_{RMS}$                 | 14          | 21       | 28       | 35       | 42       | 56       | 70        | 105       | 140       | Volts |
| Maximum DC blocking voltage  | $V_{DC}$                  | 20          | 30       | 40       | 50       | 60       | 80       | 100       | 150       | 200       | Volts |
| Maximum average forward rectified current (see Fig.1)  | $I_{(AV)}$                | 10.0        |          |          |          |          |          |           |           |           | Amps  |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method) | $I_{FSM}$                 | 150.0       |          |          |          |          |          |           |           |           | Amps  |
| Maximum instantaneous forward voltage at 10.0 A(Note 1)  | $V_F$                     | 0.45        |          | 0.55     |          |          | 0.80     |           | 0.85      | 0.90      | Volts |
| Maximum instantaneous reverse current at rated DC blocking voltage(Note 1)                       | $T_a = 25^\circ\text{C}$  | 0.2         |          |          |          |          |          |           |           |           | mA    |
|  | $T_a = 125^\circ\text{C}$ | 15          |          |          | 50       |          |          |           |           |           |       |
| Typical thermal resistance (Note 2)  | $R_{\theta JC}$           | 2.5         |          |          |          |          |          |           |           |           | °C/W  |
| Operating junction temperature range   | $T_J$                     | -65 to +150 |          |          |          |          |          |           |           |           | °C    |
| Storage temperature range  | $T_{STG}$                 | -65 to +150 |          |          |          |          |          |           |           |           | °C    |

Notes: 1.Pulse test: 300  $\mu$  s pulse width,1% duty cycle

2.Thermal resistance from junction to case

FIG.1-FORWARD CURRENT DERATING CURVE

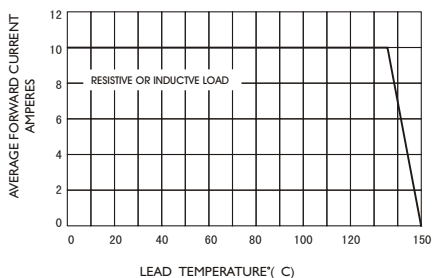


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

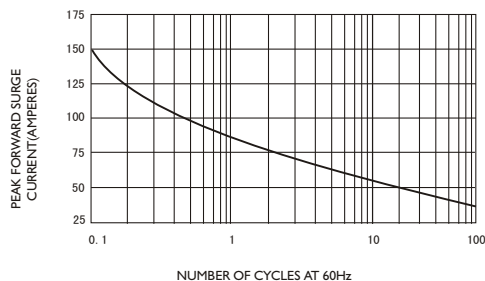


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

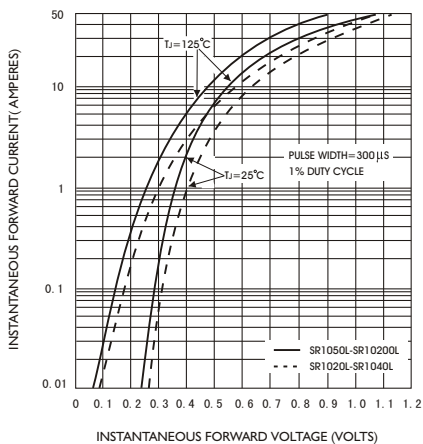


FIG.4-TYPICAL REVERSE CHARACTERISTICS

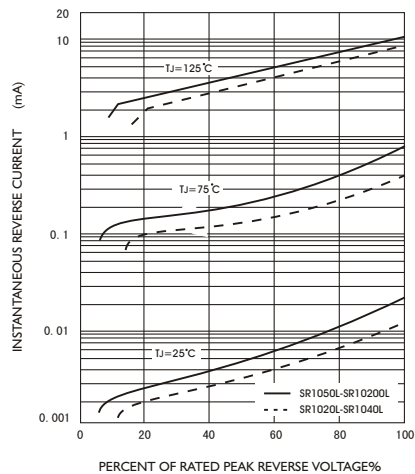


FIG.5-TYPICAL JUNCTION CAPACITANCE

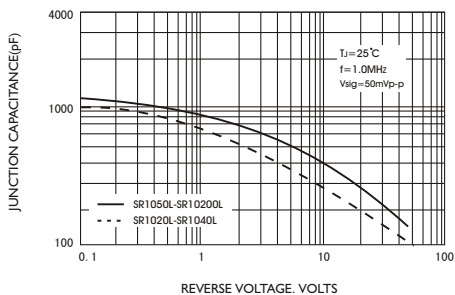


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

