





FEATURES

- The plastic package carries Underwrites Laboratory Flammability Classification 94V-0
- Construction utilizes void-free molded plastic technique
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHs 2002/95/EC and WEEE 2002/96/EC

MECHANICAL DATA

- *Case:* R-1 molded plastic body
- *Terminals:* Lead solderable per MIL-STD-750,method 2026
- *Polarity:* Color band denotes cathode end
- *Mounting Position:* Any
- *Weight:* 0.007ounce, 0.19 gram

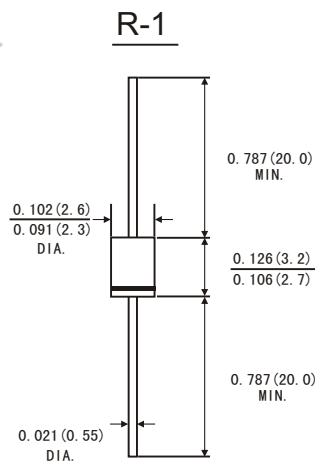

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave 60Hz.,resistive or inductive load. For capacitive load, derate by 20%.)

	Symbols	1A1	1A2	1A3	1A4	1A5	1A6	1A7	Units
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current 0.375"(9.5mm) lead length T _A =25°C	I _(AV)	1.0							Amp
Peak forward surge current (8.3ms half sine-wave superimposed on rated load (JEDEC method)at T _A =75°C	I _{FSM}	25.0							Amps
Maximum instantaneous forward voltage at 1.0 A	V _F	1.1							Volts
Maximum reverse current at rated DC blocking voltage	T _v =25°C	5.0							μA
	T _v =100°C	500							
Typical thermal resistance (Note 2)	R _{θJA}	60.0							°C/W
Typical junction capacitance (Note 1)	C _J	15.0							pF
Operating and Storage temperature Range	T _J T _{STG}	-65 to+150							°C

Note: 1.Measured at 1MHz and applied reverse voltage of 4.0V dc.

2.Thermal resistance from junction to ambient and from junction to lead at 0.375"(9.5mm)lead length ,p.c.b. mounted



FIG.1-FORWARD CURRENT DERATING CURVE

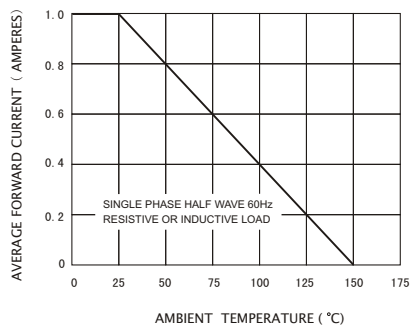


FIG.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

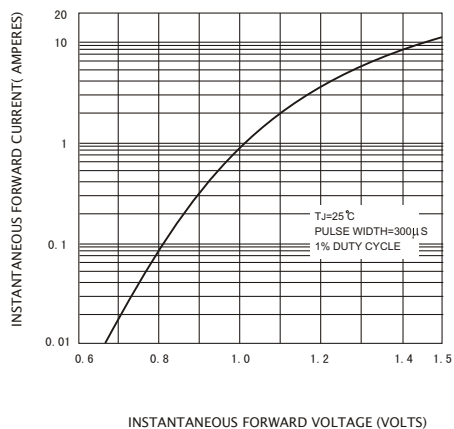


FIG.3-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

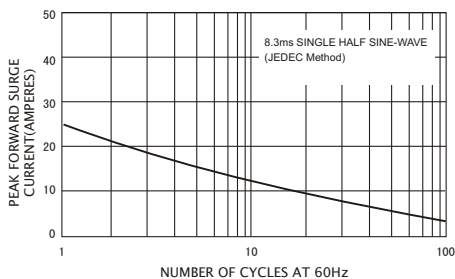


FIG.4-TYPICAL REVERSE CHARACTERISTICS

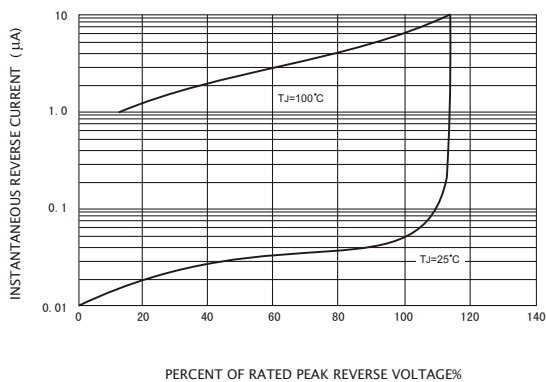


FIG.5-TYPICAL JUNCTION CAPACITANCE

