




**星合电子**  
XINGHE ELECTRONICS

6A05 THRU 6A10

GENERAL PURPOSE PLASTIC RECTIFIER  
Reverse Voltage - 50 to 1000 Volts  
Forward Current - 6.0 Amperes

## FEATURES

- The plastic package carries Underwriters Laboratory
- Flammability Classification 94V-0
- High forward current capability
- High surge current capability
- Construction utilizes void-free molded plastic technique
- High temperature soldering guaranteed: 260°C/10 seconds at terminals
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

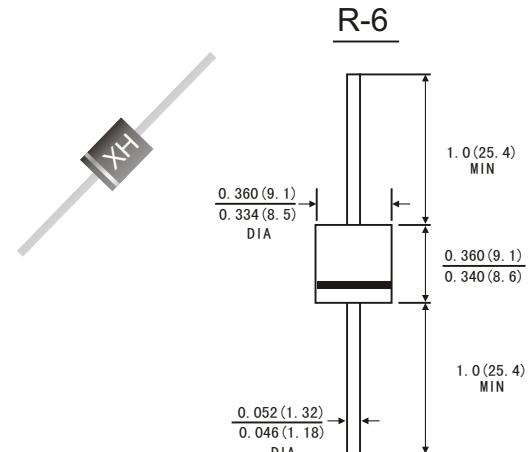

Dimensions in inches and (millimeters)

## MECHANICAL DATA

- Case:* R-6 molded plastic body
- Terminals:* Plated axial lead, solderable per MIL-STD-750, method 2026
- Polarity:* Color band denotes cathode end
- Mounting Position:* Any
- Weight:* 0.07ounce, 2.1 grams

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified, Single phase, half wave 60Hz,, resistive or inductive load. For capacitive load, derate by 20%.)

	Symbols	6A05	6A1	6A2	6A3	6A4	6A6	6A8	6A10	Unis
Maximum recurrent peak reverse voltage	V <sub>RRM</sub>	50	100	200	300	400	600	800	1000	Volts
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	210	280	420	560	700	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	300	400	600	800	1000	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length T <sub>A</sub> =60°C	I <sub>(AV)</sub>	6.0							Amps	
Peak forward surge current (8.3ms half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	250.0							Amps	
Maximum instantaneous forward voltage at 6.0 A	V <sub>F</sub>	0.95							Volts	
Maximum reverse current at rated DC blocking voltage	T <sub>A</sub> = 25°C	IR							10.0	
	T <sub>A</sub> = 100°C								400.0	
Maximum Full Load Reverse Current, Full Cycle Average .375" (9.5mm) Lead Length @T <sub>A</sub> =75°C	HTIR	5.0							μA	
Typical thermal resistance (Note 2)	R <sub>θ JA</sub>	35.0							°C/W	
Typical junction capacitance (Note 1)	C <sub>J</sub>	90							PF	
Operating and Storage temperature range	T <sub>J</sub> T <sub>STG</sub>	-65 to +150							°C	

Note: 1.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2.Mounton Cu-Pad Size 16mm×16mm on P.C.B.



星合电子  
XINGHE ELECTRONICS

6A05 THRU 6A10

GENERAL PURPOSE PLASTIC RECTIFIER  
Reverse Voltage - 50 to 1000 Volts  
Forward Current - 6.0 Amperes

FIG.1-FORWARD CURRENT DERATING CURVE

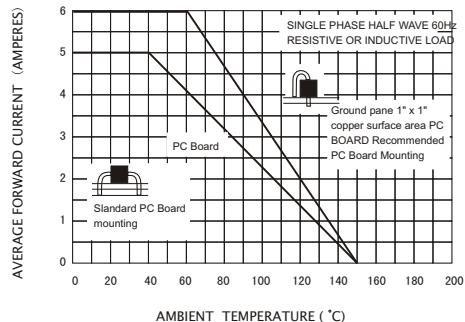


FIG.3-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

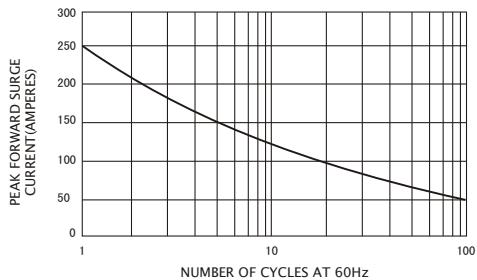


FIG.5-TYPICAL JUNCTION CAPACITANCE

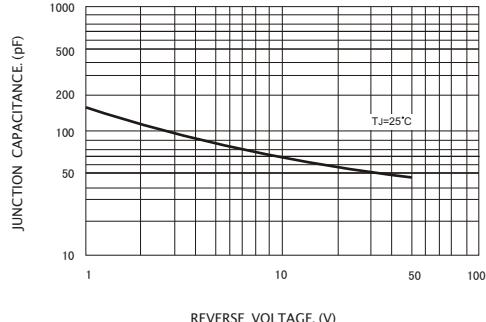


FIG.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

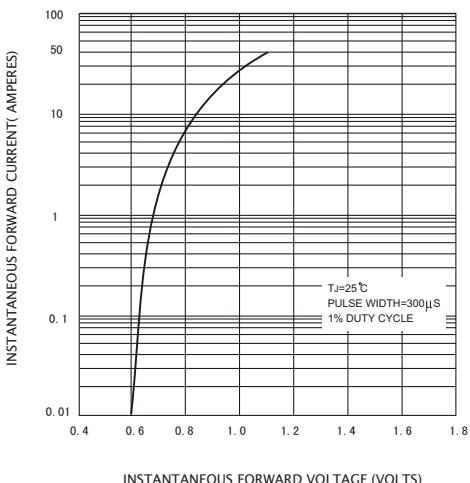


FIG.4-TYPICAL REVERSE CHARACTERISTICS

